


MONA200



永磁同步无齿轮曳引机

PERMANENT MAGNET SYNCHRONOUS GEARLESS TRACTION MACHINE

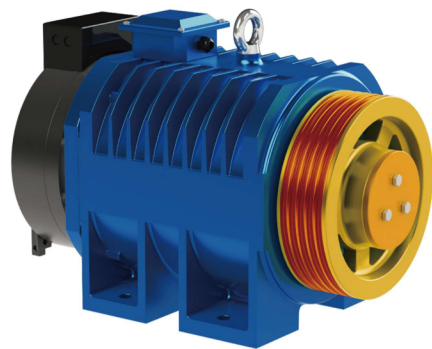

● 电源电压	Voltage	220V / 380V
● 曳 引 比	Roping	1:1 / 2:1
● 额定载重	Load	(320~630)kg
● 额定梯速	Elv. Speed	(0.4~1.75)m/s
● 曳引轮节径	Sheave Diam.	(Φ200 / Φ240 / Φ320)mm
● 防护等级	IP Code	IP41
● 绝缘等级	Ins. Class	F
● 最大轴静载	Max. Axle Load	2500kg
● 工 作 制	Duty	S5-40%
● 自 重	Weight	200kg
◎ 制动器型号 Brake Type	EMM600	电压U / 电流I DC110V / 2.5A ^{*3}

安装尺寸图 DIMENSIONS

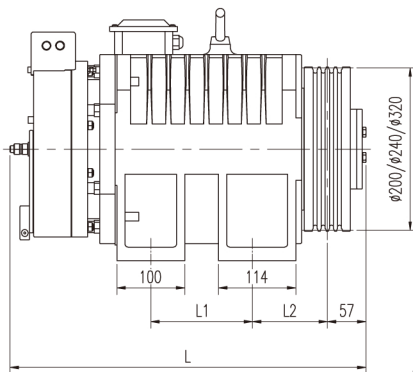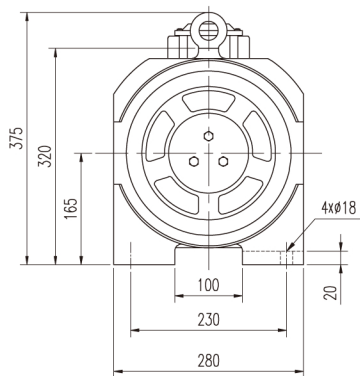

kouple asansor
کوپل آسانسور

规格表 SPEC. SHEET

型号	Type	MONA200													
规格	额定载重	额定梯速	曳引轮节径	曳引轮绳槽	电源电压	额定电流	额定功率	额定转速	额定频率	额定转矩	极数	L	L1	L2	切口角 ^{*4}
Spec.	Load	Elv. Speed	Sheave Diam.	Sheave Groove	Voltage	Current	Power	Speed	Freq.	Torque	Poles	mm	mm	mm	β Angle °
Roping 曳引比 2:1															
320-0.4A	320	0.4	200	3×Φ8×12	220 / 380	5 / 3	0.9	76	10.1	110	16	430	100	100.5	90
320-0.5A	320	0.5		3×Φ8×12	220 / 380	7 / 5	1.1	95	12.7	110	16				
320-0.63A	320	0.63		3×Φ8×12	220 / 380	7 / 5	1.4	120	16.0	110	16				
320-1.0A	320	1.0		3×Φ8×12	220 / 380	10 / 6	2.2	191	25.5	110	16				
400-0.4A	400	0.4	200	4×Φ8×12	220 / 380	6 / 4	1.1	76	10.1	140	16	430	100	100.5	
400-0.5A	400	0.5		4×Φ8×12	220 / 380	9 / 6	1.4	95	12.7	140	16				
400-0.63A	400	0.63		4×Φ8×12	220 / 380	9 / 6	1.8	120	16.0	140	16				
400-1.0A	400	1.0		4×Φ8×12	220 / 380	13 / 7	2.8	191	25.5	140	16				
450-0.4A	450	0.4	200	4×Φ8×12	220 / 380	7 / 5	1.2	76	10.1	150	16	430	100	100.5	
450-0.5A	450	0.5		4×Φ8×12	220 / 380	9 / 6	1.5	95	12.7	150	16				
450-0.63A	450	0.63		4×Φ8×12	220 / 380	9 / 6	1.9	120	16.0	150	16				
450-1.0A	450	1.0		4×Φ8×12	220 / 380	14 / 8	3.0	191	25.5	150	16				
630-0.4A	630	0.4	200	4×Φ8×12	220 / 380	8 / 6	1.7	76	10.1	210	16	520	150	110.5	
630-0.5A	630	0.5		4×Φ8×12	220 / 380	13 / 7	2.1	95	12.7	210	16				
630-0.63A	630	0.63		4×Φ8×12	220 / 380	13 / 7	2.6	120	16.0	210	16				
630-1.0A	630	1.0		4×Φ8×12	220 / 380	17 / 10	4.2	191	25.5	210	16				
320-0.4B	320	0.4	240	3×Φ8×12	220 / 380	6 / 4	0.9	64	8.5	130	16	430	100	100.5	
320-0.5B	320	0.5		3×Φ8×12	220 / 380	7 / 5	1.1	80	10.7	130	16				
320-0.63B	320	0.63		3×Φ8×12	220 / 380	7 / 5	1.4	100	13.3	130	16				
320-1.0B	320	1.0		3×Φ8×12	220 / 380	10 / 6	2.2	159	21.2	130	16				
400-0.4B	400	0.4	240	4×Φ8×12	220 / 380	7 / 5	1.1	64	8.5	160	16	430	100	100.5	
400-0.5B	400	0.5		4×Φ8×12	220 / 380	9 / 6	1.3	80	10.7	160	16				
400-0.63B	400	0.63		4×Φ8×12	220 / 380	9 / 6	1.7	100	13.3	160	16				
400-1.0B	400	1.0		4×Φ8×12	220 / 380	12 / 7	2.7	159	21.2	160	16				
450-0.4B	450	0.4	240	4×Φ8×12	220 / 380	8 / 5	1.2	64	8.5	180	16	520	150	110.5	
450-0.5B	450	0.5		4×Φ8×12	220 / 380	9 / 6	1.5	80	10.7	180	16				
450-0.63B	450	0.63		4×Φ8×12	220 / 380	9 / 6	1.9	100	13.3	180	16				
450-1.0B	450	1.0		4×Φ8×12	220 / 380	13 / 8	3.0	159	21.2	180	16				
630-0.4B	630	0.4	240	4×Φ8×12	220 / 380	10 / 8	1.7	64	8.5	260	16	520	150	110.5	
630-0.5B	630	0.5		4×Φ8×12	220 / 380	12 / 8	2.2	80	10.7	260	16				
630-0.63B	630	0.63		4×Φ8×12	220 / 380	12 / 8	2.7	100	13.3	260	16				
630-1.0B	630	1.0		4×Φ8×12	220 / 380	16 / 10	4.3	159	21.2	260	16				
320-0.5C	320	0.5	320	3×Φ8×12	220 / 380	6 / 5	1.1	60	8.0	170	16	430	100	100.5	
320-0.63C	320	0.63		3×Φ8×12	220 / 380	6 / 5	1.3	75	10.0	170	16				
320-1.0C	320	1.0		3×Φ8×12	220 / 380	9 / 6	2.1	119	15.9	170	16				
400-0.5C	400	0.5		4×Φ8×12	220 / 380	8 / 5	1.4	60	12.0	220	24				
400-0.63C	400	0.63	320	4×Φ8×12	220 / 380	8 / 5	1.7	75	15.0	220	24	520	150	110.5	
400-1.0C	400	1.0		4×Φ8×12	220 / 380	10 / 8	2.7	119	23.8	220	24				
400-1.5C	400	1.5		4×Φ8×12	220 / 380	18 / 10	4.1	179	35.8	220	24				
400-1.6C	400	1.6		4×Φ8×12	220 / 380	18 / 10	4.4	191	38.2	220	24				
400-1.75C	400	1.75	320	4×Φ8×12	220 / 380	18 / 10	4.8	209	41.8	220	24	520	150	110.5	
450-0.5C	450	0.5		4×Φ8×12	220 / 380	8 / 5	1.5	60	12.0	230	24				
450-0.63C	450	0.63		4×Φ8×12	220 / 380	8 / 5	1.9	75	15.0	230	24				
450-1.0C	450	1.0		4×Φ8×12	220 / 380	11 / 7	2.9	119	23.8	230	24				
450-1.5C	450	1.5	320	4×Φ8×12	220 / 380	19 / 11	4.5	179	35.8	230	24	520	150	110.5	
450-1.6C	450	1.6		4×Φ8×12	220 / 380	19 / 11	4.8	191	38.2	230	24				
450-1.75C	450	1.75		4×Φ8×12	220 / 380	19 / 11	5.3	209	41.8	230	24				
630-0.5C	630	0.5		5×Φ8×12	220 / 380	13 / 8	2.1	60	12.0	320	24				
630-0.63C	630	0.63	320	5×Φ8×12	220 / 380	13 / 8	2.7	75	15.0	320	24	570	200	110.5	
630-1.0C	630	1.0		5×Φ8×12	220 / 380	16 / 10	4.0	119	23.8	320	24				
630-1.5C	630	1.5		5×Φ8×12	220 / 380	27 / 16	6.4	179	35.8	320	24				
630-1.6C	630	1.6		5×Φ8×12	220 / 380	27 / 16	6.4	191	38.2	320	24				
630-1.75C	630	1.75		5×Φ8×12	220 / 380	27 / 16	7.4	209	41.8	320	24				
Roping 曳引比 1:1															
320-0.4D	320	0.4	200	4×Φ8×12	220 / 380	5 / 3	0.9	38	5.1	220	16	570	200	110.5	90
400-0.4D	400	0.4	200	5×Φ8×12	220 / 380	6 / 4	1.1	38	5.1	270	16	570	200	110.5	

注 Notes:

- △ *1、本机只用于无机房。The machine is only used for machine roomless.
△ *2、本机接线盒可选配于左置或者右置。（面对制动器）Facing the brake, junction box can be located on the left, right optionally.
△ *3、制动器电压值表示启动/维持电压。Brake voltage corresponds to its starting and sustaining voltage.
△ *4、此切口角为推荐值，可根据客户需求非标切口角度。The undercut angle is recommended value, and it's optional according to practical condition.