


GETM3.0Pro

forvorda

t1Fffl@iPJR Max. axle load	3000kg
ss1umu: Motor weight	290kg
Ja M(W,NF,t) start-up time	180
MM Ins. class	155(F)
J J & U Brake type	mozo2


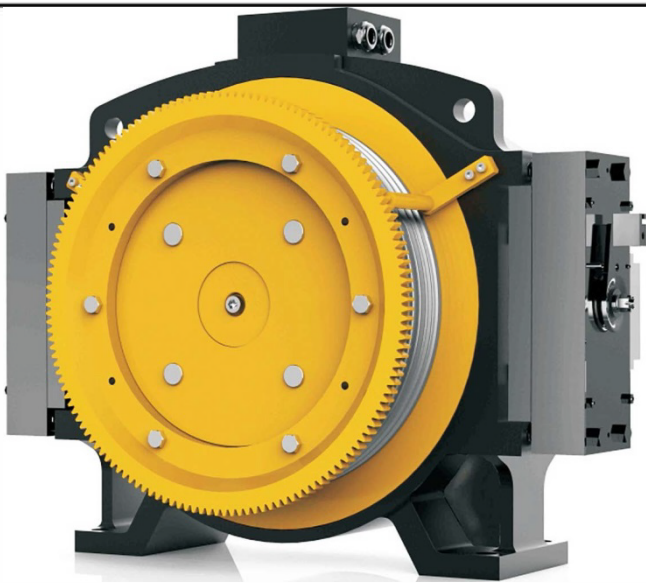


Specification table

型 号 Product type	曳引比 Traction Ratio	额定 载重 Load (kg)	额定 速度 Elevator Speed (m/s)	额定 转速 Rated Speed (r/min)	额定 转矩 Rated torque (N.m)	电机 Motor					曳引轮 Sheave			制动器 Brake	
						功率 Power (kW)	电压 Voltage (V)	电流 Current (A)	级数 Poles (p)	频率 Frequency (Hz)	节径 Diameter (mm)	绳槽数 Rope (n)	槽距 Groove pitch (mm)	电流 Current (A)	电压 Voltage (V)
GETM3.0Pro-100/0800	2:1	800		96	500	5.0	340	13		23.9	400	8Xq110	15	2x1.5	DC110
GETM3.0Pro-150/0800			1.5	143	511	7.7		19	30	35.8					
GETM3.0Pro-175/0800			1.75	167	511	8.9		21		41.8					
GETM3.0Pro-100/1000					604	6.0		15		23.9					
GETM3.0Pro-150/1000	2:1	1000		143.0	639	9.8	340	23	30	35.8	400	6Xq11Q	15	2x1.5	DC110
GETM3.0Pro-175/1000	2:1	1050	1.75	167	639	11.2	340	27		41.8	400	6xq110	15	2x1.5	DC110
GETM3.0Pro-100/1050			1	96	634	6.3		16		23.9					
GETM3.0Pro-150/1050			1.5	143	669	10.0		23	30	35.8					
GETM3.0Pro-175/1050			1.75	187	669	11.7		28		41.8					

It: 1, i; l_cffi.Ill1J9tk, Jf\$NWJ;1 ODF III"-lift; 2, - - - - 11#, v#1 or".NI:litffII,ii;
Nata:1. Above paramaun for irriormation only, final para... shall be u i - ODF. 2. Quantity of rope gnxMI oomber, φangle and y angle """" be tailoMnlllda according to ctmlomar's 11tquam.

Overall Dimensions

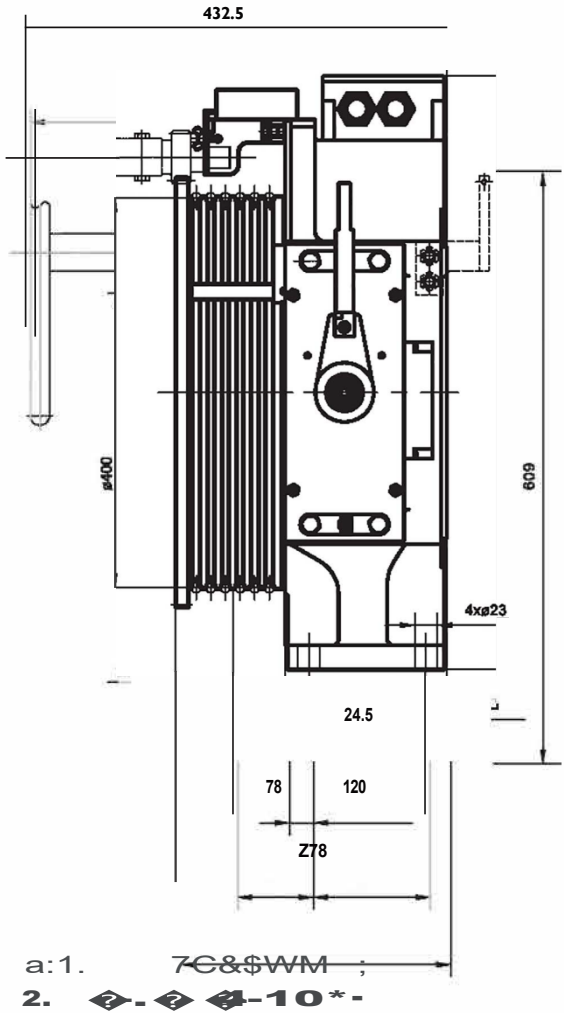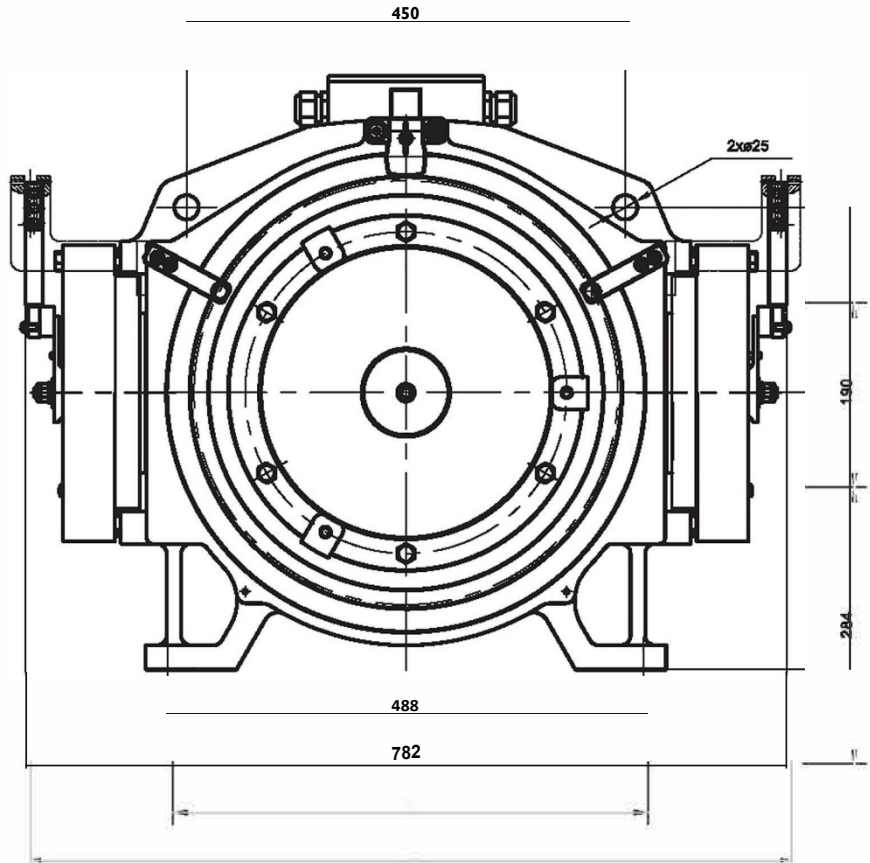

Remarks:
1.Both hand w1nd and hand w1nd-less types are eavallaba.
2.Remote r/lease device is available,the length of r/leasing wirv ranges 4-10m.

kouple asansor
کوپل آسانسور

FWD 富沃德