



Industrie Service

# EU TYPE-EXAMINATION CERTIFICATE

According to Annex IV, Part A of 2014/33/EU Directive

**Certificate No.:** EU-BD 766

**Certification Body of the Notified Body:** TÜV SÜD Industrie Service GmbH  
Westendstr. 199  
80686 Munich - Germany  
Identification No. 0036

**Certificate Holder:** Chr. Mayr GmbH & Co. KG  
Eichenstr. 1  
87665 Mauerstetten - Germany

**Manufacturer of the Test Sample:** Chr. Mayr GmbH & Co. KG  
Eichenstr. 1  
87665 Mauerstetten - Germany  
(Manufacturer of Serial Production – see Enclosure)

**Product:** Braking device acting on the shaft of the traction sheave, as part of the protection device against overspeed for the car moving in upwards direction and braking element against unintended car movement

**Type:** RSR/8010.\_\_\_\_\_, Size 200, 400, 600, 800, 1000, 1500

**Directive:** 2014/33/EU

**Reference Standards:** EN 81-20:2014  
EN 81-50:2014  
EN 81-1:1998+A3:2009

**Test Report:** EU-BD 766 of 2015-09-30

**Outcome:** The safety component conforms to the essential health and safety requirements of the mentioned Directive as long as the requirements of the annex of this certificate are kept.

**Date of Issue:** 2015-09-30

**Date of Validity:** from 2016-04-20

Achim Janocha  
Certification Body "lifts and cranes"



**1 Scope of application**

**1.1 Use as braking device – part of the the protection device against overspeed for the car moving in upwards direction – permissible brake torques and tripping rotary speeds**

1.1.1 Permissible brake torques and maximum tripping rotary speeds of the traction sheave when the brake device acts on the shaft of the traction sheave while the car is moving upward

| Size       | Permissible brake torque [Nm] | Max. tripping rotary speed of the traction sheave [rpm] |
|------------|-------------------------------|---|
| 200        | 200 - 560                     | 811   |
| 200 „lang“ | 500 - 700                     | 820   |
| 400 „kurz“ | 420 - 840                     | 708   |
| 400 „lang“ | 750 - 1200                    | 1011  |
| 600        | 1000 - 1600                   | 500   |
| 800        | 1300 - 1900                   | 400   |
| 1000       | 1840 - 2400                   | 400   |
| 1500       | 2400 - 3600                   | 400   |

1.1.2 Maximum tripping speed of the overspeed governor and maximum rated speed of the lift

The maximum tripping speed of the overspeed governor and the maximum rated speed of the lift must be calculated on the basis of the traction sheave's maximum tripping rotary speed as outlined above taking into account traction sheave diameter and car suspension.

$$v = \frac{D_{TS} \times \pi \times n}{60 \times i}$$

$v$  = Tripping (rated) speed (m/s)  
 $D_{TS}$  = Diameter of the traction sheave from rope's center to rope's center (m)  
 $\pi$  = 3,14  
 $n$  = Rotary speed (rpm)  
 $i$  = Ratio of the car suspension

**1.2 Use as braking element – part of the protection device against unintended car movement (acting in up and down direction) – permissible brake torques, tripping rotary speeds and characteristics**

1.2.1 Nominal brake torques and response times with relation to a brand-new brake element

| Size                               | Min. nominal brake torque* [Nm] | Max. nominal brake torque* [Nm] | Max. tripping rotary speed [rpm] | Maximum response times** [ms]                                    |           |           |
|------------------------------------|---------------------------------|---------------------------------|----------------------------------|--|-----------|-----------|
|                                    |                                 |                                 |                                  | parallel without overexcitation /<br>seriell with overexcitation |           |           |
|                                    |                                 |                                 |                                  | $t_0$  | $t_{50}$  | $t_{90}$  |
| 200                                | 2 x 100 = 200                   |                                 | 820                              | 100 / 110  | 160 / 230 | 230 / 330 |
| 200                                |                                 | 2 x 280 = 560                   | 820                              | 25 / 30  | 60 / 80   | 110 / 135 |
| 200 „lang“                         | 2 x 250 = 500                   |                                 | 820                              | 25 / 30  | 50 / 65   | 110 / 135 |
| 200 „lang“                         |                                 | 2 x 350 = 700                   | 820                              | 15 / 20  | 30 / 50   | 80 / 100  |
| 400 „kurz“                         | 2 x 210 = 420                   |                                 | 710                              | 135 / 140  | 185 / 265 | 240 / 340 |
| 400 „kurz“                         |                                 | 2 x 420 = 840                   | 710                              | 50 / 55  | 90 / 130  | 160 / 230 |
| 400 „kurz“ -<br>leistungsoptimiert |                                 | 2 x 350 = 700                   | 335                              | 30 / 40  | 80 / 100  | 100 / 150 |
| 400 „lang“                         | 2 x 375 = 750                   |                                 | 500                              | 40 / 45  | 75 / 105  | 135 / 190 |
| 400 „lang“                         |                                 | 2 x 550 = 1100                  | 500                              | 25 / 40  | 60 / 75   | 100 / 120 |
| 600                                | 2 x 500 = 1000                  |                                 | 500                              | 85 / 100   | 140 / 200 | 185 / 260 |



**Annex to the EC Type-Examination Certificate  
No. EU-BD 766 of 2015-09-30**



Industrie Service

|      |                 |                 |     |          |           |           |
|------|-----------------|-----------------|-----|----------|-----------|-----------|
| 600  |                 | 2 x 800 = 1600  | 500 | 30 / 40  | 70 / 100  | 120 / 170 |
| 800  | 2 x 650 = 1300  |                 | 400 | 80 / 100 | 145 / 180 | 170 / 230 |
| 800  |                 | 2 x 950 = 1900  | 400 | 35 / 45  | 80 / 115  | 120 / 160 |
| 1000 | 2 x 920 = 1840  |                 | 400 | 80 / 95  | 125 / 180 | 180 / 250 |
| 1000 |                 | 2 x 1200 = 2400 | 400 | 40 / 50  | 95 / 130  | 150 / 210 |
| 1500 | 2 x 1200 = 2400 |                 | 400 | 75 / 90  | 160 / 190 | 270 / 310 |
| 1500 |                 | 2 x 1800 = 3600 | 400 | 35 / 40  | 105 / 115 | 180 / 240 |

Interim values can be interpolated

**Explanations:**

- \* **Nominal brake torque:** Brake torque assured for installation operation by the safety component manufacturer.
- \*\* **Response times:**  $t_x$  time difference between the drop of the braking power until establishing X% of the nominal brake torque,  $t_{50}$  optionally calculated  $t_{50} = (t_{10} + t_{90})/2$  or value taken from the examination recording

1.2.2 Assigned execution features

|                                   |   |
|-----------------------------------|---|
| Type of powering / deactivation   | continuous current / continuous current end |
| Brake control                     | parallel or serial                          |
| Nominal air gap                   | 0.45 mm                                     |
| Damping elements                  | YES   |
| Overexcitation (Seize 200 – 1000) | at 1.5 non-release voltage                  |
| Overexcitation (Seize 1500)       | at double non-release voltage               |

**2 Conditions**

- 2.1 Above mentioned safety component represents only a part at the protection device against over-speed for the car moving in upwards direction and unintended car movement. Only in combination with a detecting and triggering component in accordance with the standard (two separate components also possible), which must be subjected to an own type-examination, can the system created fulfil the requirements for a protection device.
- 2.2 The installer of a lift must create an examination instruction to fulfil the overall concept, add it to the lift documentation and provide any necessary tools or measuring devices, which allow a safe examination (e. g. with closed shaft doors).
- 2.3 The manufacturer of the drive unit must provide calculation evidence that the connection traction sheave – shaft – brake disc and the shaft itself is sufficiently safe, if the brake disc is not a direct component of the traction sheave (e. g. casted on). The shaft itself has to be statically supported in two points.  
The calculation evidence must be enclosed with the technical documentation of the lift.
- 2.4 The setting of the brake torque has to be secured against unauthorized adjustment (e. g. sealing lacquer).
- 2.5 The identification drawing no. E02801000000161 including stamp dated 2015-09-30 shall be included to the EU type-examination for the identification and information of the general construction and operation and distinctness of the approved type.
- 2.6 The EU type-examination certificate may only be used in combination with the corresponding annex and enclosure (List of authorized manufacturer of the serial production). The enclosure will be updated immediately after any change by the certification holder.

**Annex to the EC Type-Examination Certificate  
No. EU-BD 766 of 2015-09-30**



Industrie Service

**3 Remarks**

- 3.1 A code number for the brake moment effectively adjusted will be marked at the first blank in the type designation 8010. \_\_ . \_\_ within the permissible scope of application. A code number for design characteristics which are not directly part of the type-examination will be marked at the rest of the blanks (e. g. in the second blank: with flange plate, in the third blank: with hand release; in the fourth blank: release control and/or wear control; in the fifth blank: characteristics for electrical connection).
- 3.2 In the scope of this type-examination it was found out, that the brake device also functions as a brake for normal operation, is designed as a redundant system and therefore meets the requirements to be used also as a part of the protection device against overspeed for the car moving in upwards direction and as braking element as part of the protection device against unintended car movement.
- 3.3 Checking whether the requirements as per section 5.9.2.2 of EN 81-20:2014 (D) have been complied with is not part of this type examination.
- 3.4 Other requirements of the standard, such as reduction of brake moment respectively brake force due to wear or operational caused changes of traction are not part of this type examination.
- 3.5 This EU type-examination certificate was issued according to the following standards:
- EN 81-1:1998 + A3:2009 (D), Annex F.7 and F.8
  - EN 81-20:2014 (D), part 5.6.6.11, 5.6.7.13
  - EN 81-50:2014 (D), part 5.7 and 5.8
- 3.6 A revision of this EU type-examination certificate is inevitable in case of changes or additions of the above mentioned standards or of changes of state of the art.

**Enclosure to the EU Type-Examination Certificate  
No. EU-BD 766 of 2015-09-30**



**Authorised Manufacturer of Serial Production – Production Sites (valid from: 2016-01-13):**






**Company Address** Chr. Mayr GmbH & Co. KG  
Eichenstr. 1  
87665 Mauerstetten - Germany

**Company Address** Mayr Power Transmission Co. Ltd.  
7 Fuxin Road, Jiangsu Province  
215637 Zhangjiagang - P.R. China

**Company Address** Mayr Polska Sp. z. o. o.  
Rojów, ul. Hetmanska 1  
63-500 Ostrzesów - Poland

- END OF DOCUMENT -



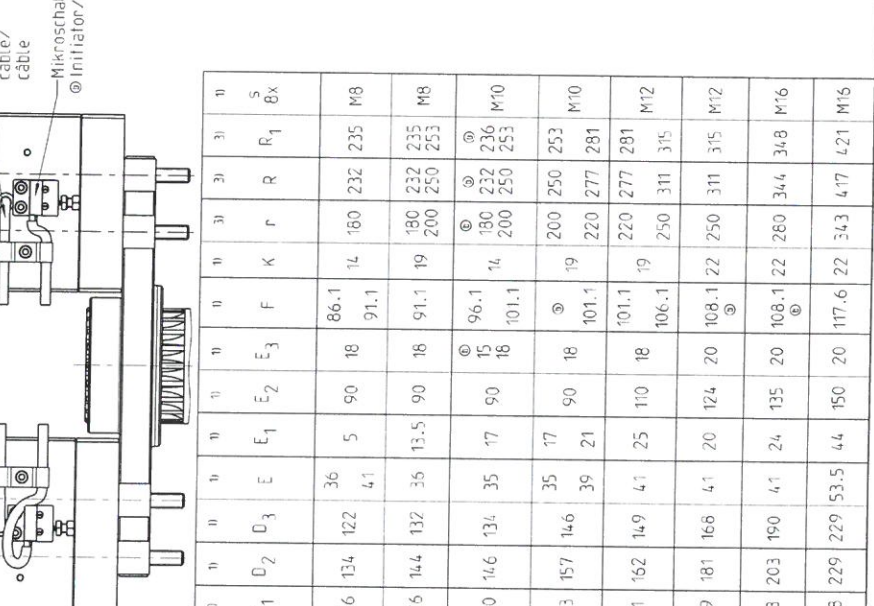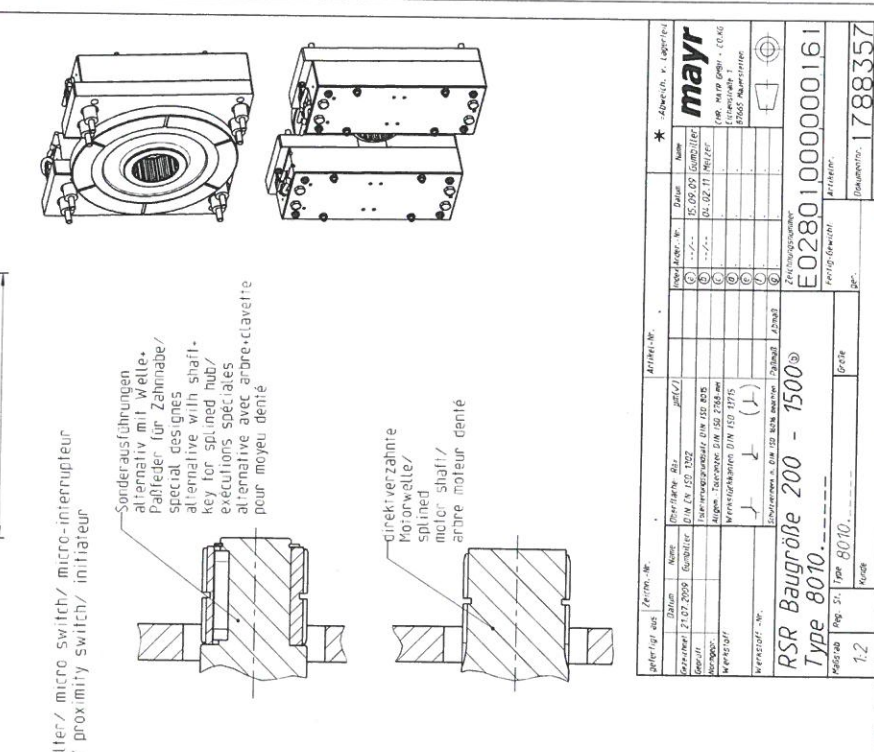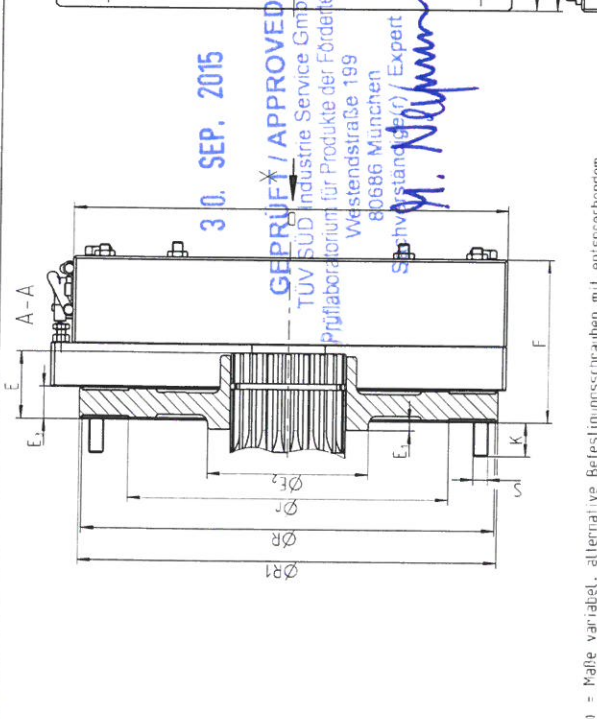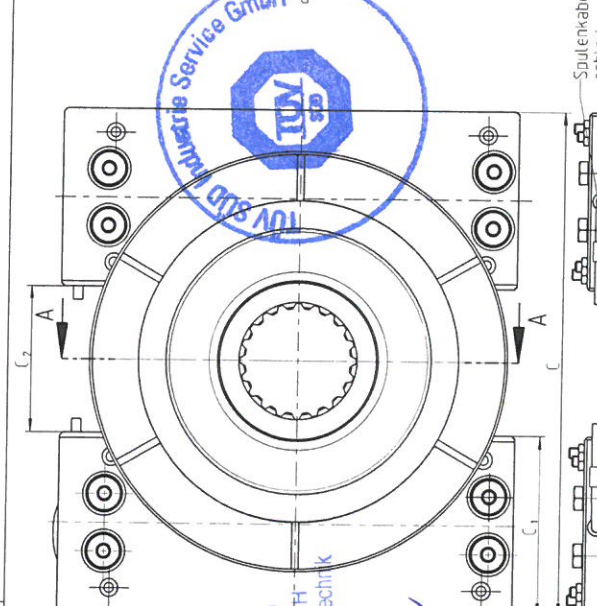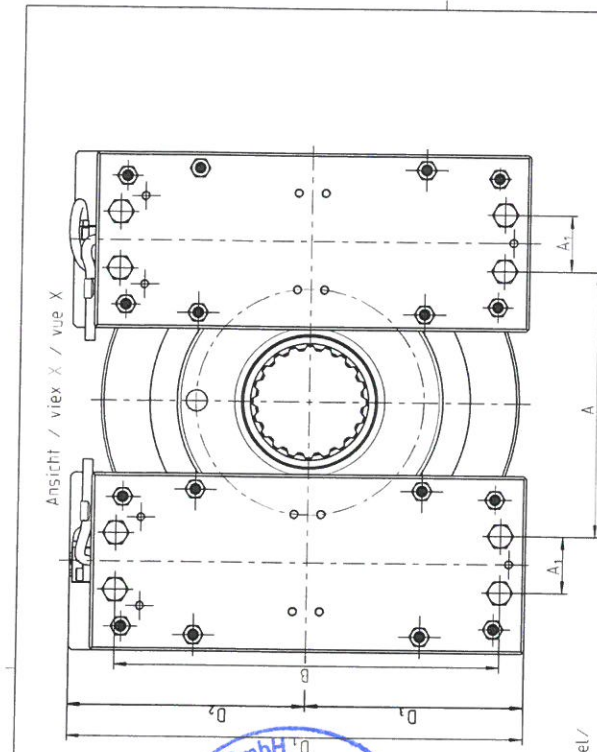

| Größe/<br>size/<br>taille | Bremsmomente/<br>braking torque/<br>couples de freinage | Max. Auslässe<br>Drehzahl/<br>max. over<br>speed/<br>vitesse max. | 2) Vorlagereisungen<br>der Motorwelle<br>DIN 5480 / 16mm /<br>Aparajages lech<br>de 16mm /<br>Canales de 16mm |     | A  | A1  | B   | C   | C1 | C2  | D   | D1  | D2  | D3   | E  | E1   | E2  | E3 | F     | K  | R   | R1  | S   | 1)  |
|---------------------------|---|---|---|-----|----|-----|-----|-----|----|-----|-----|-----|-----|------|----|------|-----|----|-------|----|-----|-----|-----|-----|
| 200                       | 2x100<br>bis<br>2x260                                   | 811   | 60 x 2,5 x 22<br>65 x 3 x 20<br>67 x 3 x 21   | 138 | 32 | 216 | 270 | 100 | 70 | 244 | 256 | 134 | 122 | 41   | 36 | 5    | 90  | 18 | 86.1  | 14 | 160 | 232 | 235 | M8  |
| 200<br>lang               | 2x250<br>bis<br>2x350                                   | 620   | 65 x 3 x 20<br>67 x 3 x 21<br>72 x 3 x 22   | 147 | 28 | 235 | 275 | 100 | 75 | 264 | 275 | 144 | 132 | 35   | 17 | 13.5 | 90  | 18 | 91.1  | 19 | 180 | 232 | 235 | M8  |
| 400<br>Kurz               | 2x210<br>bis<br>2x420                                   | 708   | 65 x 3 x 20<br>67 x 3 x 21<br>72 x 3 x 22   | 153 | 42 | 238 | 315 | 120 | 75 | 268 | 280 | 146 | 134 | 35   | 17 | 13.5 | 90  | 18 | 96.1  | 14 | 200 | 250 | 253 | M10 |
| 400<br>lang               | 2x375<br>bis<br>2x600                                   | 1011  | 72 x 3 x 22<br>82 x 3 x 26<br>90 x 3 x 28   | 128 | 42 | 256 | 290 | 120 | 50 | 290 | 303 | 157 | 146 | 39   | 21 | 17   | 90  | 18 | 101.1 | 19 | 200 | 250 | 253 | M10 |
| 600                       | 2x500<br>bis<br>2x800                                   | 500   | 72 x 3 x 22<br>82 x 3 x 26<br>90 x 3 x 28   | 165 | 50 | 264 | 355 | 140 | 75 | 298 | 311 | 162 | 149 | 41   | 25 | 17   | 110 | 18 | 101.1 | 19 | 220 | 277 | 291 | M12 |
| 800                       | 2x650<br>bis<br>2x950                                   | 400   | 82 x 3 x 26<br>90 x 3 x 28<br>98 x 4 x 32   | 169 | 56 | 300 | 375 | 150 | 75 | 336 | 349 | 181 | 166 | 41   | 20 | 17   | 124 | 20 | 108.1 | 22 | 250 | 311 | 315 | M12 |
| 1000                      | 2x920<br>bis<br>2x1200                                  | 400   | 90 x 3 x 28<br>98 x 4 x 32<br>115.9 x 5 x 22  | 175 | 60 | 342 | 395 | 160 | 75 | 380 | 393 | 203 | 190 | 41   | 24 | 17   | 135 | 20 | 108.1 | 22 | 280 | 344 | 348 | M16 |
| 1500                      | 2x1200<br>bis<br>2x1800                                 | 400   | 95 x 3 x 30<br>98 x 4 x 23<br>115 x 5 x 22  | 210 | 70 | 410 | 480 | 200 | 80 | 458 | 458 | 229 | 229 | 53.5 | 44 | 24   | 150 | 20 | 117.6 | 22 | 343 | 417 | 421 | M15 |

1) = Maße variabel, alternative Befestigungsschrauben mit entsprechendem Festigkeitsnachweis/  
dimensions variable, alternative bolts with relevant stressability proof/  
Dimensions variables, autres vis de fixation possibles avec contrôle de qualité correspondant.

2) = alternative Verzahnungen mit entsprechendem Festigkeitsnachweis/  
alternative splinnings with relevant stressability proof/  
Autres cameures possibles avec contrôle de qualité correspondant

3) = alternative Rotor Durchmesser mit entsprechendem Befestigungsnachweis/  
alternative rotor diameters with relevant calculation of spring configuration/  
Autres diamètres de rotor possibles avec contrôle des ressorts correspondant



3.0. SEP. 2015

GEPRÜFT / APPROVED  
TÜV SÜD Industrie Service GmbH  
PrüfLaborium für Produkte der Fördertechnik  
Westendstraße 199  
80686 München  
SPW-Verstand (Bsp) / Expert  
M. Nijman

Starbühne / Form. No. **RSR Baugröße 200 - 1500**  
 Type **8010**  
 Zeichnungsnummer **E02801000000161**  
 Fertigungsjahr **2015**  
 Fertigungsnummer **1788357**